


DU091 | C250 (Group 3)

Ductile Iron Access Cover

DU091 600x600x70

Ductile iron access cover, for use in areas where not extending more than 500mm from the kerb face into carriageway. Capable of withstanding a 250kN (25 tonnes) test load.

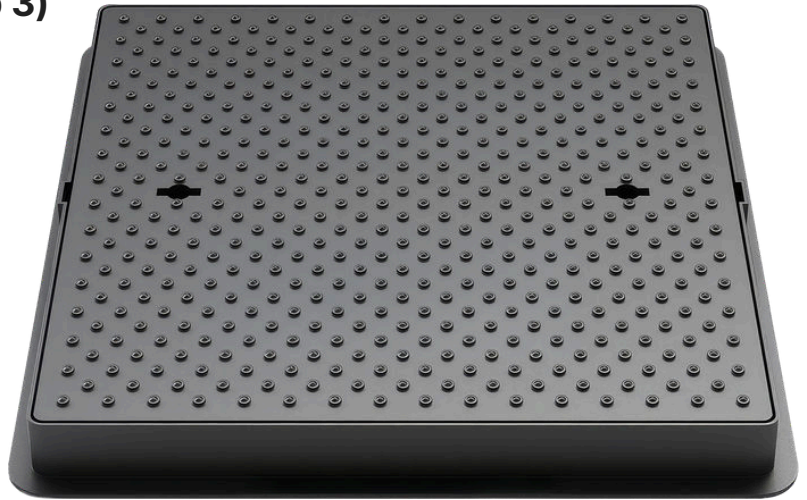

PRODUCT CODE	DU091
CLEAR OPENING	600mm x 600mm
BASE SIZE	742mm x 742mm
DEPTH	70mm

OPTIONAL EXTRAS


Rubber seal
Badged
Locked
Vented

Key features

- 
SMARTGRIP TECHNOLOGY™
Unique pattern design provides a PSRV value of >70 (UKAS Accredited 3rd Party).
- 
KITEMARK
Exceeds the requirements of BS EN124-2:2015, tested and certified by BSI.
- 
RATIO
Ductile iron for improved weight to strength ratio.
- 
COATING
Black coated finish.
- 
STRONG & DURABLE
Spheroidal graphite cast iron according to EN 1563:2018, as per the requirements of BS EN124-2:2015.
- 
RECYCLABLE
Long life asset with high circularity contributing to the reduction in carbon footprint.
- 
DOUBLE SEAL
Double seal option provides additional air tightness and eliminates odour from reaching the surface.

TECHNICAL DATA

Materials	Ductile Iron
Finish	Black Coated
Certification	BSI Kitemark
Standard	EN124-2:2015
Product Type	Ductile Iron Access Cover

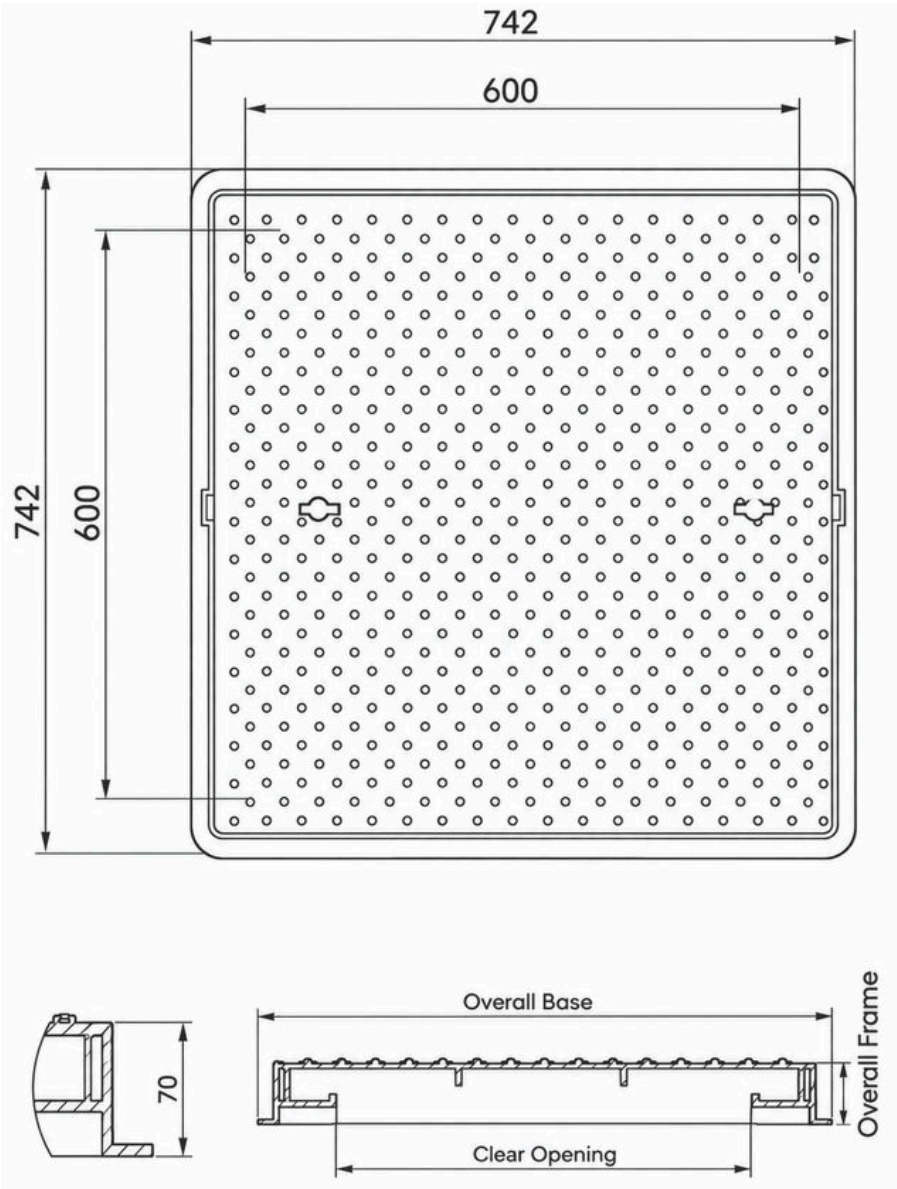

DISCLAIMER

We are continually seeking to improve our products and we therefore reserve the right to alter product specifications without prior notice. It is the responsibility of all users to ensure that the above product data is current. Installation details are available on request. It is always recommended that the use of road plates be used where access covers, gully grates and frames are exposed to construction and site traffic during the construction phase of any project and in accordance with "Annex F" EN124-1:2015.